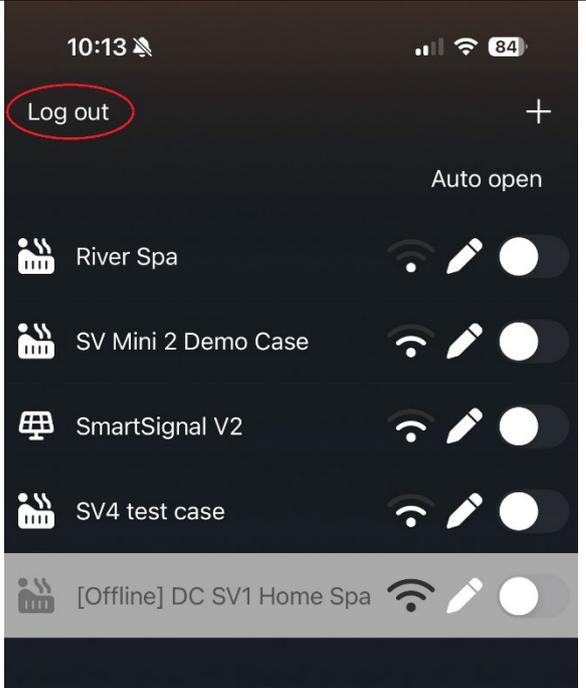
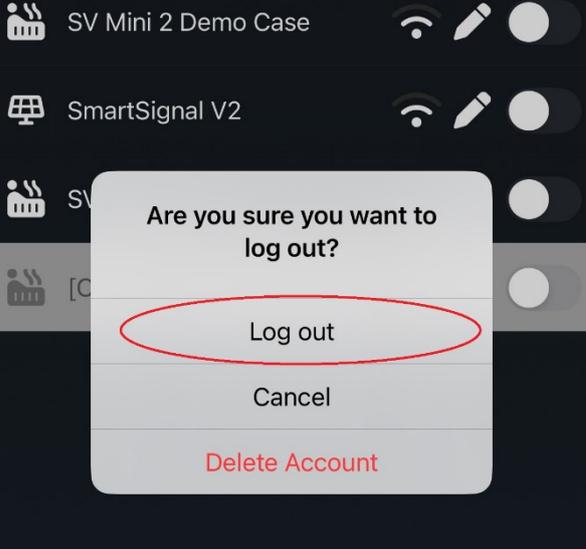


TECHNOTE


Update firmware to SmartLink V3 WiFi module

Related Products:


SmartLink **V3** WiFi module only

<p>1) Press on Logout to return to Sign-In page</p>	 <p>The screenshot shows the top portion of the SmartLink V3 app interface. At the top, the time is 10:13 and the battery level is 84%. The 'Log out' button is circled in red. Below it, there is an 'Auto open' section and a list of spa units: River Spa, SV Mini 2 Demo Case, SmartSignal V2, and SV4 test case. Each unit has a Wi-Fi icon, an edit icon, and a toggle switch.</p>
<p>2) Do NOT delete account, just press on Log Out</p>	 <p>The screenshot shows the same app interface as above, but with a confirmation dialog box overlaid. The dialog asks 'Are you sure you want to log out?' and has three buttons: 'Log out' (circled in red), 'Cancel', and 'Delete Account' (in red text).</p>


3) Press on firmware update icon

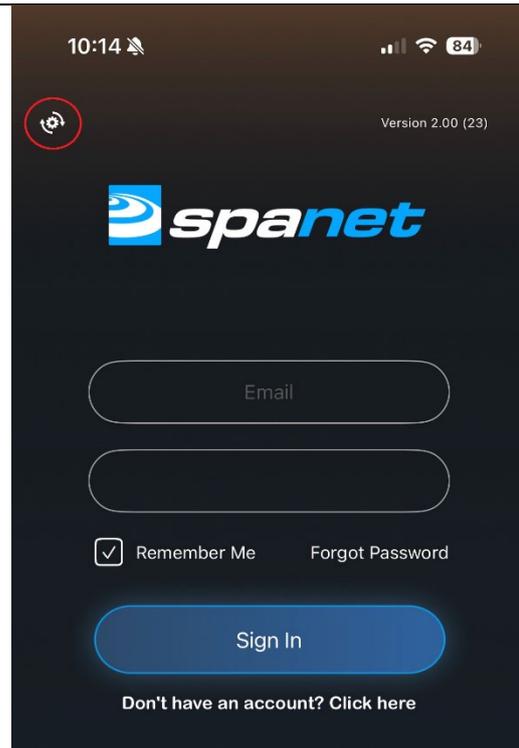

4) Select SmartLink (SV-WIFI) from the device type list and wait for the firmware to download

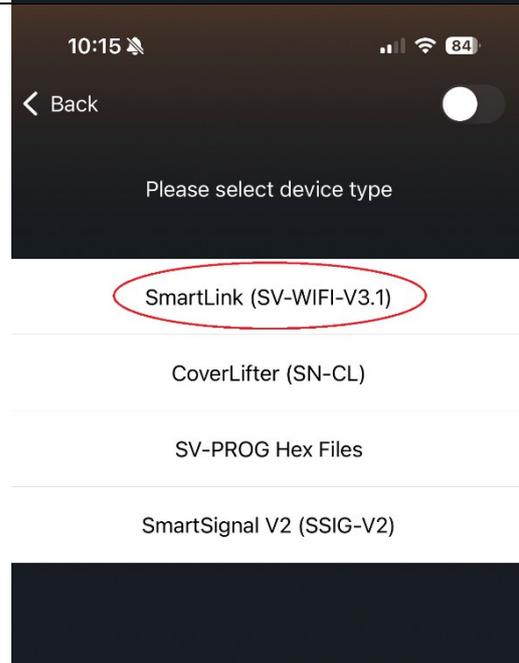

5) Now select SV-Wifi-V3.1 to begin the firmware update process to the SmartLink module.

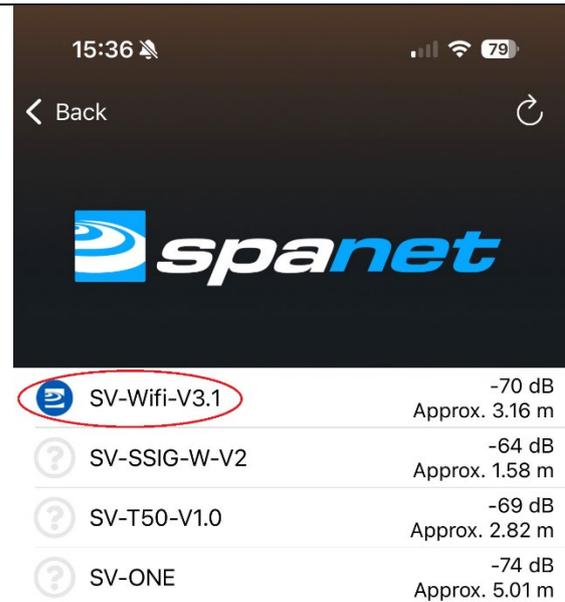

6) Wait until firmware process completes

- a. **NOTES:** The update process is completed over the air via Bluetooth so you must **remain in close proximity to the spa** for the duration of the firmware update process.
- b. It is best practise to ensure your phone does not go into screen time-out during the firmware update. To avoid that please tap on empty blue space from time to time to keep your screen awake and avoid taking calls.



7) Once the firmware update has finished, please wait for 2 minutes for the SmartLink module to reboot then complete a power reset to the spa (i.e. turns mains power OFF for 10 seconds, then turn back ON).